

Play value

The claddings of the tower walls are de-barked by hand allowing them to retain the natural structure of the wood. This means you can still feel where the branches used to grow on the tree, and the grain remains visible. The natural surface is more important to us than the cost savings of using industrial production. The playrooms of our towers are also little individual play-house offers and their size matches that of a child's perception. By providing intermediate floors, cosy little rooms are created; some are fitted with a hatch. A bench in the bottom room is an inviting place to meet for a chat where children feel sheltered and protected. Climbing up to the next floor in the tower is also very exciting. The various combination elements such as slide, suspension bridge, chain path etc. make the tower especially appealing. To enhance the transparency, the side walls of the tower can be fitted with four lookout slits at an additional charge.



Order No. 3.20500 Square Tower



Fundamental characteristics

- high-quality design
- very special appeal
- versatile opportunities for combination
- rooms for play inside
- incentive for playing: experiencing height, cosy rooms
- exercise activity: climbing, role-playing games

Suitable

- for children from 5 years of age
- for public playgrounds
- kindergartens
- children's homes

Towers for combination

Square Tower Square Tower with Roof




3.20500




3.20600

Order No. 3.20500 Square Tower

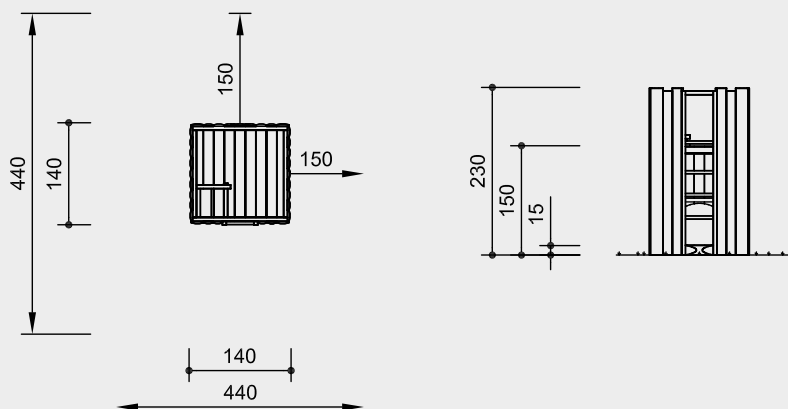

Order No. 3.20600 Square Tower with Roof

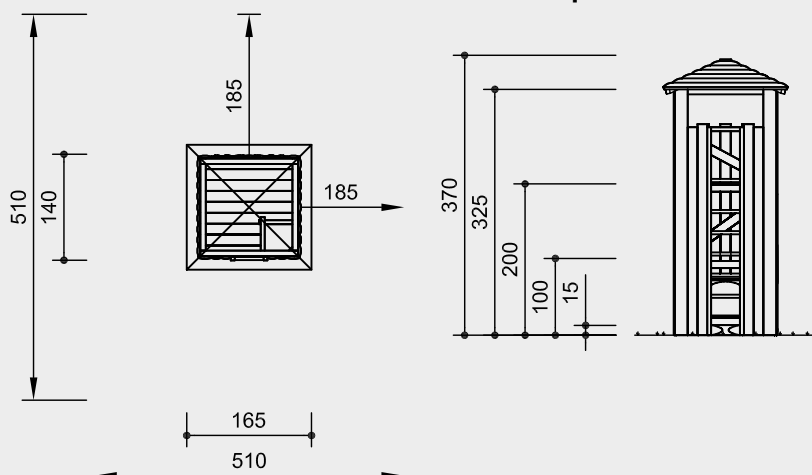

scale 1:100

safety check according to EN 1176

Technical information

cladding panels of spruce/fir, boiler pressure impregnated according to DIN 68800-3, use class 4, all other wooden parts made of non-impregnated mountain larch

core-free timber

sawn timbers core-free, thus decreasing occurrences of cracking

claddings

thickness 3 – 5 cm, de-barked by hand

hardwood rungs

climbing rungs of hardwood, milled and mortised, Ø 42 mm

ground anchor

all parts used for anchoring to the ground made of hot-dip galvanised steel



Please refer to the price list for a more detailed explanation of the quality characteristics.

completely assembled construction

Dimensions

(small deviations possible)

Order No. 3.20500 Square Tower

height	2.30 m
floor heights	0.15 m
	1.50 m
footprint	1.40 x 1.40 m
weight	350 kg

Order No 3.20600 Square Tower with Roof

height	3.70 m
floor heights	0.15 m
	1.00 m
	2.00 m
footprint	1.40 x 1.40 m
with roof	1.65 m x 1.65 m
weight	550 kg

Components

Order No 3.20500

- 1 tower with:
- 2 floors, 1 ladder
- 1 bench in the lower room
- 1 passageway
- 4 steel feet

Order No 3.20600

- 1 tower with:
- 3 floors, 1 ladder
- 1 bench in the lower room
- 1 passageway from 1st to 2nd floor
- 1 roof
- 4 steel feet

Installation information

Surfacing requirements

Tower corresponding to

a fall height of ≤ 1.50 m

Tower with Roof corresponding to

a fall height of ≤ 2.00 m

(please refer to price list for more detailed information)

Foundations

4 items 50 x 50 x 55 cm

excavation depth 75 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions.

Technical changes reserved.

Equipment also available made of larch.



3.20500



3.20600