

**Play value**

House combinations with basic furnishings like a table and benches promote role games such as family and neighbourhood games and are a friendly centre-piece of playgrounds. It is possible to drive child vehicles onto the ramp and directly in front of the house, and the steps invite sitting. The play houses with their different levels are an incentive for active play.



Order No. L4.10900 made of larch

**Fundamental characteristics**

- child proportions according to ergonomic requirements
- agreeably designed ensemble for role games
- appealing design by: arrangement of the houses, sheltering roofs, mixed material forms: claddings/square timber
- natural wooden surface which appeals to the senses
- sturdy roof construction
- incentive for playing: furniture, stairs, ramps
- movement: crawling, hiding, movement on the ramp


**House Group C**

**Suitable**

- for older than, but also suitable for children under 3 years
- for public playgrounds
- playgrounds situated near houses
- nurseries
- children's homes
- therapy institutions for children
- school playgrounds
- leisure areas
- camp sites



**4.10900**

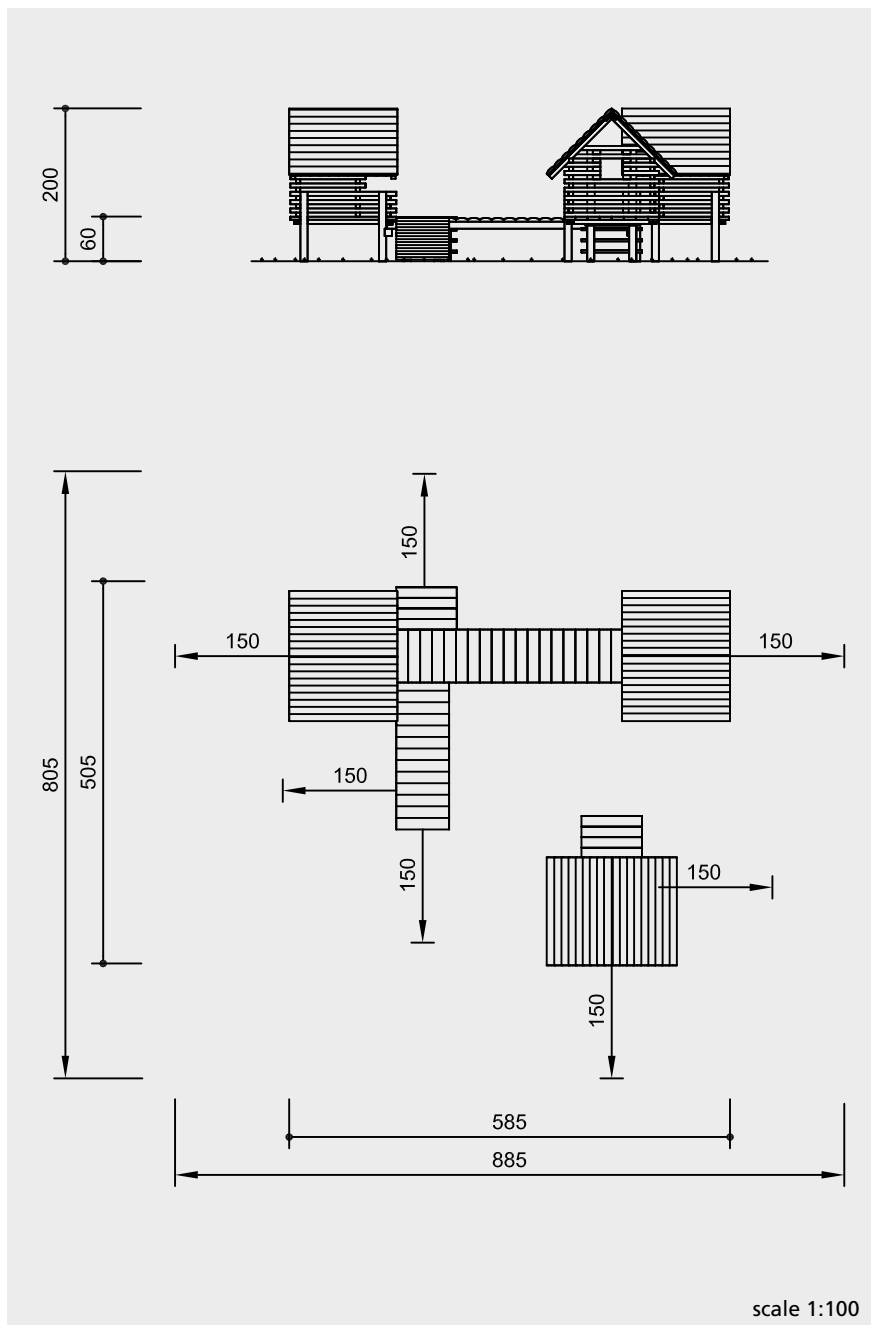

Safety check according to EN 1176

### Components

- 3 timber houses on stilts
- 1 bridge
- 1 inclined ramp with foundation irons
- 2 narrow stairs with foundation irons

### Installation information

Surfacing requirements corresponding to a fall height of  $\leq 0.60$  m (please refer to price list for more detailed information)

#### Foundations

**Timber Houses**  
12 items 50 x 50 x 40 cm  
excavation depth 60 cm

**Ramp**  
1 item 30 x 50 x 30 cm  
excavation depth 50 cm


**Stairs**  
2 items 30 x 70 x 20 cm  
excavation depth 40 cm

#### Attention:

**Exact measurements may vary, for all installation dimensions refer to current installation instructions.**

Technical changes reserved.

**Equipment also available with steel feet or made of larch with steel feet.**



4.10900

### Technical information

#### core-free timber

sawn timbers core-free, of spruce/fir, boiler pressure impregnated according to DIN 68800-3, use class 4



#### claddings

thickness 3 - 5 cm, de-barked by hand, boiler pressure impregnated according to DIN 68800-3, use class 4



floors of the houses of 27 mm tongue and groove boards

Ramp, bridge and stairs of non-impregnated mountain larch

steps of hardwood, 32 mm

**Order No. 4.10900** impregnated version with double-layered roof of 21 mm boards and 3 - 5 cm thick cladding

**Order No. L4.10900** version in larch with single-layered roof of 4 - 5 cm thickness, half-rebated cladding

#### Dimensions

(small deviations possible)

length 5.85 m  
width 5.05 m

#### Timber Houses

height 2.00 m  
height floor 0.60 m

#### Bridge

height 0.60 m  
length 3.00 m  
width 0.70 m

#### Ramp

length 3.00 m  
width 0.70 m

#### Stair

width 0.80 m

weight 1150 kg

For more detailed explanation of the quality characteristics see price list.