

Play value

Children like to exercise on all manner of things and particularly enjoy a mobile ground surface on which skill can be tested. In order to get the rocking plank moving, it is necessary to jump up and down vigorously - the harder the better here. The Totter Path also challenges participants to jump vigorously. The floor surface of the equipment moves, centrally mounted, similar to a see-saw, up and down and children can take out their natural energy on it without danger.



Order No. 6.52300 Totter Path

Fundamental characteristics

- incentive for playing: handrail, springs, see-sawing surface
- movement: jumping, rocking, wobbling

Suitable

- for children from 6 years
- for public playgrounds
- playgrounds near houses
- school playgrounds
- leisure areas
- outdoor swimming pools
- pedestrian areas
- institutions for people with special needs
- for installation alongside paths

Barrier-free

- special exercise experience
- with a carer




Standard colour of springs: red


**Rocking Plank
Totter Path**

Copyright © Richter Spielgeräte GmbH 01/16


Design H. Kükelhoas



6.52200



6.52300

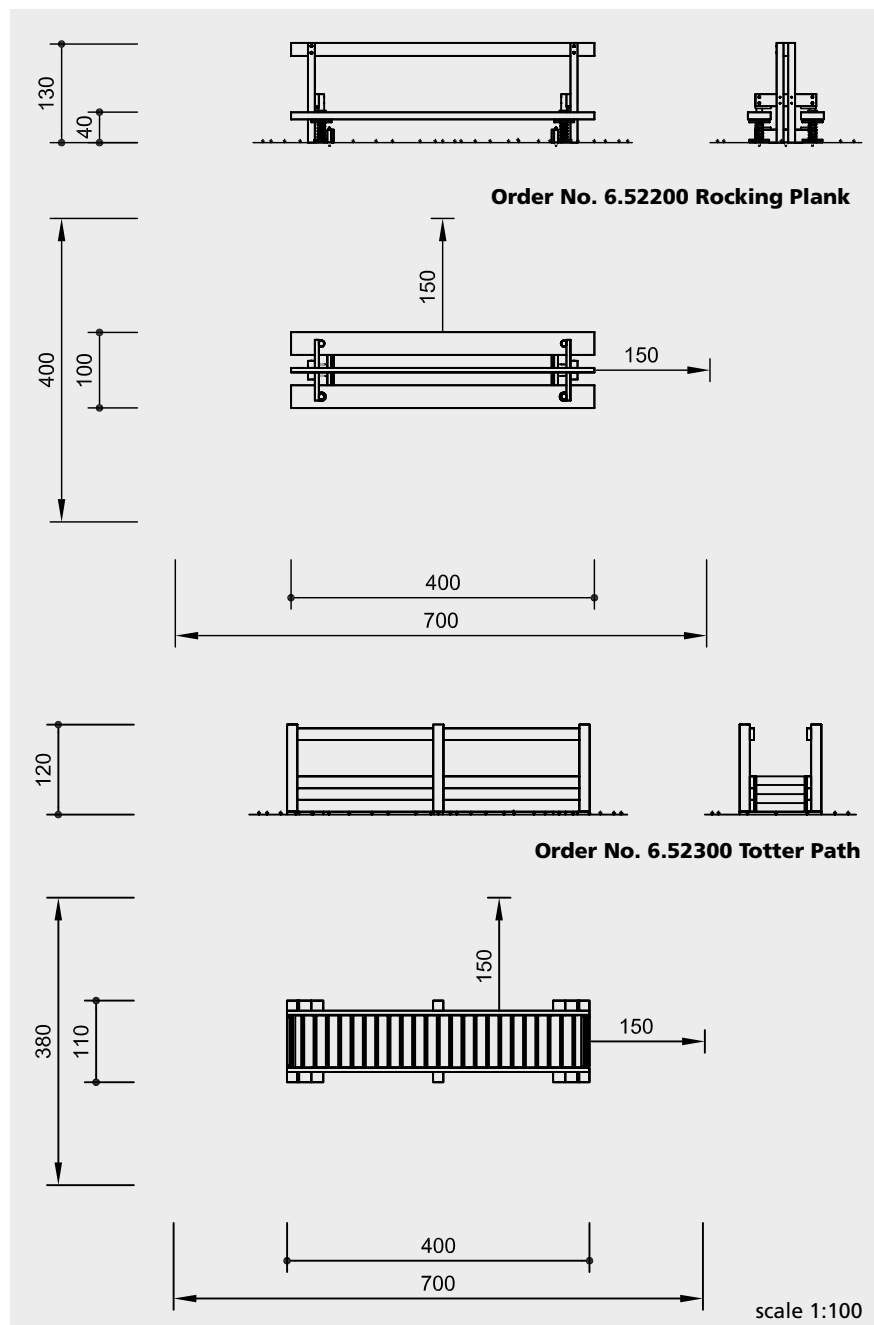

Safety check according to EN 1176

Components

Order No. 6.52200 Rocking Plank

- 2 support frames with 2 springs each
- 2 planks
- 1 handrail
- 4 foundation irons

Order No. 6.52300 Totter Path

- 1 totter path with foundation anchor

Installation information

Surfacing requirements corresponding to a fall height of ≤ 0.60 m (please refer to price list for more detailed information)

Foundations

Order No. 6.52200 Rocking Plank

- 2 items 50 x 120 x 27 cm
- excavation depth 50 cm


Order No. 6.52300 Totter Path

- 2 items 40 x 40 x 30 cm
- excavation depth 50 cm


Attention:

Exact measurements may vary, for all installation dimensions refer to current installation instructions.

Technical changes reserved.



6.52200



6.52300

Technical information

Order No. 6.52200 Rocking Plank

equipment of non-impregnated mountain larch

core-free timbers

sawn timbers are core-free, by that formation of cracks can be reduced



ground anchor

all parts used for anchoring to the ground made of hot-dip galvanised steel



round timbers of ash, Ø 80 mm

springs powder coated, standard colour red

Order No. 6.52300 Totter Path

equipment of non-impregnated mountain larch

core-free timbers

sawn timbers are core-free, by that formation of cracks can be reduced



claddings

thickness 4 - 5 cm, de-barked by hand



brass bush

sturdy mechanism: for all to and fro movements we use bush bearings which allow for self-lubrication while in use and which can be easily exchanged in case of need



ground anchor

all parts used for anchoring to the ground made of hot-dip galvanised steel



foundation anchor coated

Dimensions

(small deviations possible)

Order No. 6.52200 Rocking Plank

- height 1.30 m
- height of boards 0.40 m
- length 4.00 m
- width 1.00 m
- weight 300 kg

Order No. 6.52300 Totter Path

- height 1.20 m
- length 4.00 m
- width 1.10 m
- weight 450 kg

For more detailed explanation of the quality characteristics see price list.