

Play value

Our Play Wall consists of several small house elements. With their different spaces and levels, they offer numerous opportunities for hiding away, climbing up, sliding down and going through openings. The coziness of the little niches also provides children with enough space for imaginative role-play games. The modular Play Wall can be expanded to suit any needs and can be erected in a row or also at right angles. It is not just a unique play space but can also serve as sight and noise protection for playgrounds situated adjacent to roads.



Copyright © Richter Spielgeräte GmbH 10/15

Design G. Beltzig

Fundamental characteristics

- child-oriented dimensions according to ergonomic knowledge
- the space-defining design appeals to the senses
- high-quality design
- numerous play offers
- can be combined with other equipment
- incentive for playing: sand hoists, sand wheel, chains, role-playing games
- movement: climbing, crawling, crouching


Play Wall Type 01

Suitable

- for children from 3 years of age
- for public playgrounds
- playgrounds situated near houses
- kindergartens/nurseries
- children's homes
- leisure areas of elementary schools



8.50001

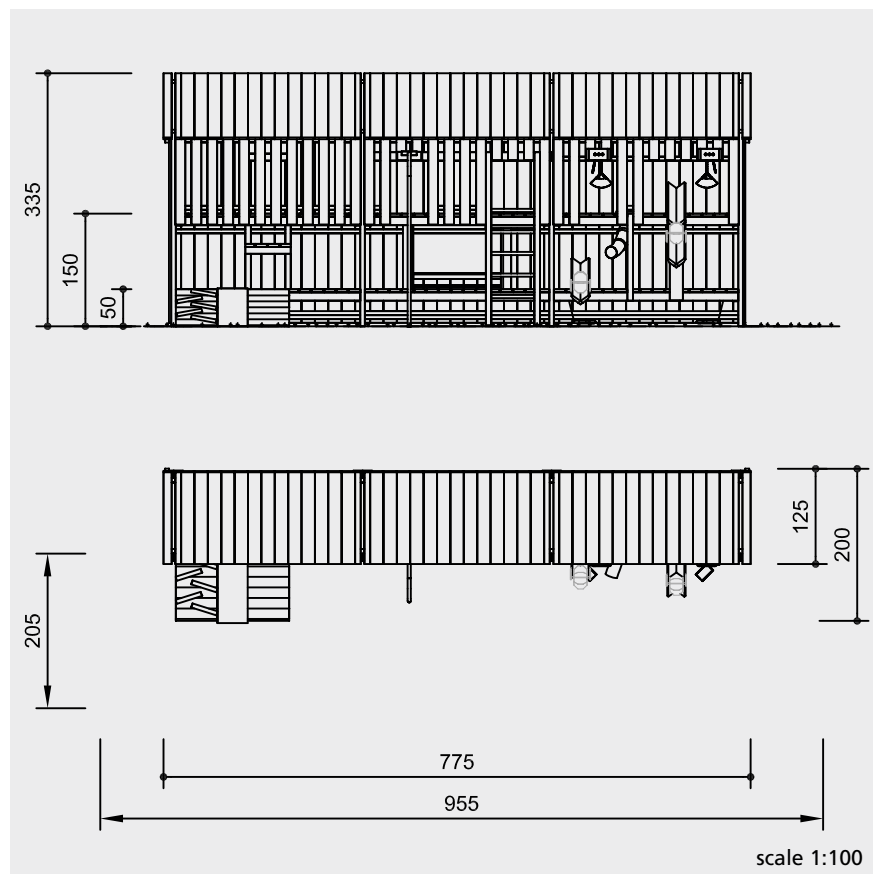

safety check according to EN 1176

Components

- 3 play wall modules with roof
- 1 ramp with inclined stainless steel surface and foot holds as climbing aids
- 1 internal platform as climbing aid
- 1 ladder, height 1.50 m
- 2 sand hoists
- 1 sand chute
- 1 top part of sand chute
- 2 sand wheels
- 1 bent sand pipe
- 2 sand shovels
- 1 bent fireman's pole
- 1 drawing board

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m (please refer to price list for more detailed information)
Sand is required for correct functioning.

Foundations

Play wall
4 items 195 x 100 x 20 cm
excavation depth 60 cm

Ramp
2 items 30 x 30 x 30 cm
excavation depth 50 cm

Firemen's pole
1 item 30 x 30 x 30 cm
excavation depth 60 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current installation instructions.

Technical changes reserved.

Technical information

wooden parts of non-impregnated mountain larch

core-free timber

sawn timbers core-free, thus decreasing occurrences of cracking



tongue and groove

intermediate floors made of 40 mm tongue and groove boarding, roof and rear wall 30 mm



hardwood rungs

climbing rungs of hardwood, milled and mortised, \varnothing 42 mm



ground anchor

all parts used for anchoring to the ground made of hot-dip galvanised steel



chains

suspended on short-link chains, 6 mm, welded before hot-dip galvanisation (stainless steel chains available on request)



assembly frames between the three modules and in the side walls made of hot-dip galvanised steel tubing 60 x 60 mm

firemen's Pole made of stainless steel, glass bead blasted

drawing board

made of HPL high-pressure laminated wood, thickness 10 mm, surface mat, colour ultramarine

stainless steel incline

Dimensions

(small deviations possible)

height	3.35 m
height pylons	0.50 / 1.50 m
length	7.75 m
width	2.00 m
weight	on request

Please refer to the price list for a more detailed explanation of the quality characteristics.



8.50001