

Play value

Swinging and rocking are typical movements in the childhood. Children are looking for possibilities to experience this swinging movement. Lying in the Cradle Nest is even more pleasant when a friendly co-player sets the swing into motion from outside. It is special fun if there are several "chicks" in the nest.

Fundamental characteristics

- emotionally appealing design
- sturdy construction of round poles
- incentive for playing: lying oneself in a nest
- exercise activity: swaying, rocking, swinging

Recommended

- for small children's areas of:
 - public playgrounds
 - play spaces situated near houses
 - kindergartens/nurseries
 - children's homes
 - child therapy centres
 - camp sites
- day nurseries

barrier-free


- special exercise experience
- together with a carer



Swallow's Cradle Nest special



Order No. 6.14720 Swallow's Cradle Nest special

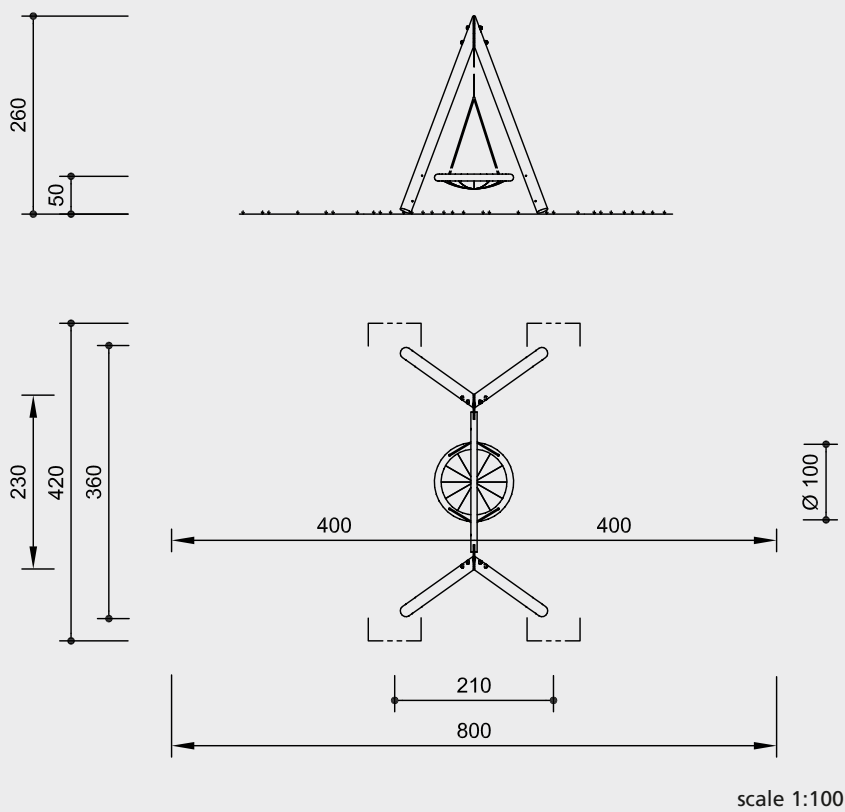

safety check according to EN 1176

Components

- 1 swing frame with steel feet and cross beam made of steel
- 1 swallow's nest suspended on ropes and chains

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m (please refer to price list for more detailed information)

Foundations
4 items 60 x 70 x 60 cm
excavation depth 80 cm

Attention!
Exact measurements may vary;
for all installation dimensions refer to current assembly instructions.
Technical changes reserved.

Technical information

equipment of non-impregnated mountain larch

de-barked
de-barked posts, \varnothing 15 to 18 cm



universal joint
drop-forged, hot-dip galvanised joint yoke; the universal joint insert consists of two swing bearings, here reinforced workmanship



concealed head
large surface for pressure distribution, prevents water from getting inside, protects the bolt head



adjustable
bolt connections with milled metal rings or serrated press-in-dowels for connections which are stressed cross-wise



brass bush
for all to and fro movements we use brass bush bearings which allow for self-lubrication while in use and can be easily exchanged if required



crossbar
of hot-dip galvanised steel, with rigid corner connection by that smaller foundations are possible



ground anchor
all parts used for anchoring to the ground are made of hot-dip galvanised steel



swallow's nest \varnothing 100 cm with green rope ring (PPM), net seat and suspension rope black \varnothing 16 mm (polyester)

suspended on \varnothing 7 mm stainless steel chains

Dimensions
(small deviations possible)

height	2.60 m
vertical clearance	2.40 m
width	3.60 m
depth	2.10 m
weight	240 kg

Please refer to the price list for a more detailed explanation of the quality characteristics.

