

Play value

Because of their striking shape, the Pentagonal Towers are real eye-catchers and are therefore well suited as a playground signal. They lend the site a very special, unmistakable character. The gaps in the cladding allow light to pass through and give children the opportunity to reach and experience heights. The installation of slides, e.g. as a tunnel slide increases the exercise activity. Several towers can be combined using connection tunnels to create a small village.

Fundamental characteristics

- reach and experience heights
- walls with gaps can be combined with open slides and tunnel slides, connection tunnel, telescopes, kaleidoscope, prisms

Suitable

- for children from 5 years
- for public playgrounds, leisure parks



This picture shows a special version of the Middle Pentagonal Tower, closed to a height of 2.40 m.

Middle Pentagonal Tower
total height 6.70 m


Large Pentagonal Tower
total height 8.20 m



3.52000



3.53000

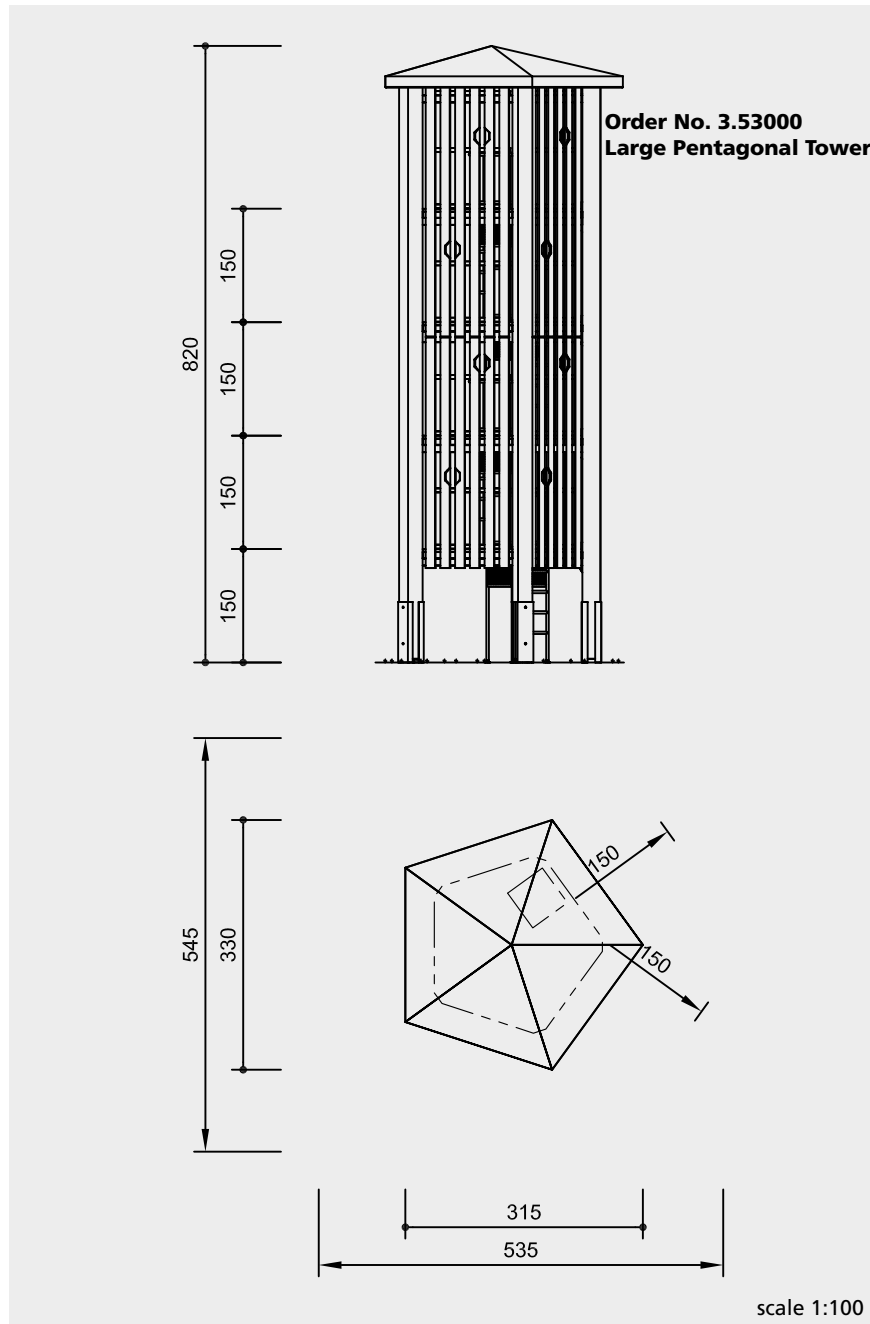

Order No. 3.53000
Large Pentagonal Tower

Safety check according to EN 1176

Components

**Order No. 3.52000
Middle Pentagonal Tower**

- 5 laminated beams with steel feet
- 3 floors
- 3 ladders
- 5 wall elements
- 5 roof elements

**Order No. 3.53000
Large Pentagonal Tower**

- 5 laminated beams with steel feet
- 4 floors
- 4 ladders
- 10 wall elements
- 5 roof elements

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m or depending on combination equipment (please refer to price list for more detailed information)

Foundations
1 item Ø 360 cm x 90 cm
excavation depth 110 cm

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
Technical changes reserved.

Technical information

equipment made of non-impregnated mountain larch

core-free timber

sawn timbers are core-free, by that formation of cracks can be reduced



claddings

thickness 4 to 5 cm, timbers de-barked by hand



tongue and groove

platform floors made of 40 mm tongue and groove boarding



laminated

laminated beams of the stand posts glued according to DIN 1052



ground anchor

all parts used for anchoring to the ground made of hot-dip galvanised steel



roof, floor frame and ladders on the inside made of stainless steel, glass bead blasted

acrylic glass in window openings

Dimensions

(small deviations possible)

**Order No. 3.52000
Middle Pentagonal Tower**

- height 6.70 m
- floor heights 1.50/3.00/4.50 m
- floor space Ø 2.05 m
- footprint Ø 3.50 m
- incl. roof
- length 3.15 m
- width 3.30 m
- weight 3500 kg

**Order No. 3.53000
Large Pentagonal Tower**

- height 8.20 m
- floor heights 1.50/3.00/4.50/6.00 m
- floor space Ø 2.05 m
- footprint Ø 3.50 m
- incl. roof
- length 3.15 m
- width 3.30 m
- weight 4000 kg

For more detailed explanation of the quality characteristics see price list.



3.52000



3.53000